

Thin Coat Angle Bead

Provides a true, clean corner for plasterboard or any smooth background. Protects and reinforces plasterboard joints to minimise cracking.

Applications

Using stainless steel nails (compatible with bead material) complying with BS 1202:Part 1, fixed at a maximum of 600mm apart. When nailing to a solid background the line of the bead will follow the line of the background.


Press the bead onto dabs of the same material as the undercoat; dabs should be applied at a maximum of 600mm apart. This method will even out minor irregularities in the line of the background, although the line of the bead will tend to generally follow the line of the background.

When beads are used with metal lath backgrounds, stainless steel tying wire may be used to secure the beads in position. Soft stainless steel wire complying with BS 1554 should be used to match the bead and lath materials. All wires should be twisted tightly and the ends bent away from the finished face of the coating. Beads may be trimmed to length using fine toothed hacksaw or tin snips. PVC pipe weld adhesive can be used for butt joints in conjunction with link pegs where required.

Benefits:

Precision engineered perforation pattern. 0.25mm high ribs at regular intervals. Pro-Grip™ Adhesion system for a stronger bond. Withstands most site damage, non corrosive & unaffected by weathering. Impact resistant, lightweight and safe handling.

Thin coat angle beads have been designed to be used externally where galvanised beads are not recommended, and internally in areas where high moisture or damp exist.

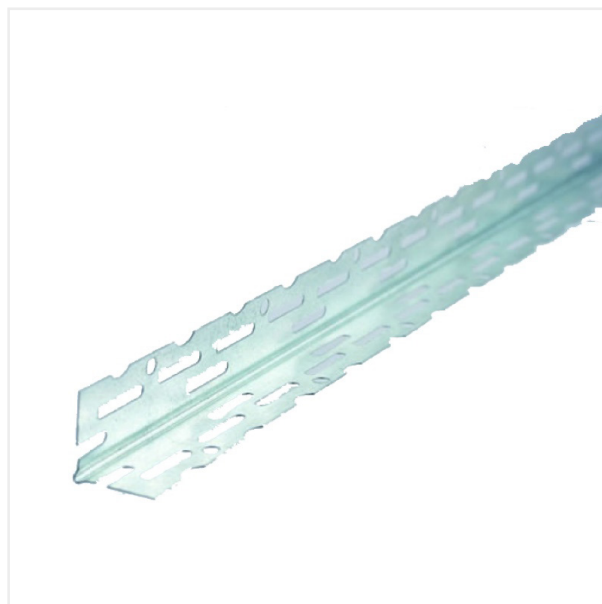

The most appropriate bead should be chosen to suit the application, required plaster depth and the desired finish. Application and installation should be in accordance with BS 5492:1990 Code of Practice for internal plastering and BS 5262:1991 Code of Practice for external renderings. Thin coat angle beads conform to BS EN 13914-1:2005 and are manufactured from virgin polyvinylchloride unplasticized, which is impact resistant, external window grade and UV stable.